


## LED Flush Mount Kit

### WIRING

- To +VDC (fuse @ 1A) ..... **RED**
- To -Chassis Ground ..... **BLACK**
- For Synchronization and Flash Pattern..... **YELLOW**
- Connect **YELLOW** wires of multiple lightheads together for synchronization (All heads should be set at the same Flash Pattern)

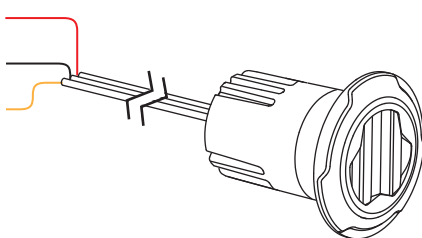

### OPERATION

For Simultaneous or Alternating Flash:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthouse will display short (single or double) flash:
  - Single flash = Group1
  - Double flash = Group2
2. Remove **YELLOW** wire from +VDC then momentarily apply +VDC to change Groups:
  - Heads of the same Group will flash together.
  - Heads of different Groups will flash alternately.
3. Save and Exit the Grouping Mode by powering off the lighthouse.

For Flash Patterns:

Momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quick three times for FP#1

**NOTE:** This unit may not be factory set at FP# 1.

FLASH PATTERNS	
1	Double [R65]
2	Single [2Hz]
3	Triple [2Hz]
4	Quad [2Hz]
5	Random
6	Steady
7	Single [SAE] [CA13]
8	Mega [SAE]
9	Double [SAE]
10	Triple [SAE]
11	Quad [SAE]
12	Quint [SAE]
13	Ultra [SAE]
14	Single-Quad
15	Single H/L
16	Singe-Triple-Quint