

BB001 BUTTON BLAST

ECE R65 Hideaway Warning Lamp

(Recessed Flush Fit/Bracket Surface Mount)



Features

- ECE R10 EMC Compliance.
- Multi-units synchronization in simultaneous or alternating flash.
- Water and vibration resistant design for external use.
- Supplied with mounting bracket, rubber grommet, fixing kit and control box
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Reverse polarity protection.

Specification

Approvals: ECE R65 (Amber & Blue); ECE R10; IP67

Bulb: High-power LED x 4 pcs (per light unit)

Warning Patterns: 26 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: Single Light unit - 0.5A @12VDC / 0.25A @24VDC
(varies with flash pattern)

Double Light unit - 0.8A @12VDC / 0.56A @24VDC
(varies with flash pattern)

Max. Current: 2A @12VDC / 1A @24VDC

Max. Power: 10 Watts

Wires: Red-Vcc

Black-GND


Yellow-Flash Patterns

White-Sync

Fuse Recommended: 2A

Multi-Unit Synchronization: Up to 15 units

Dimensions

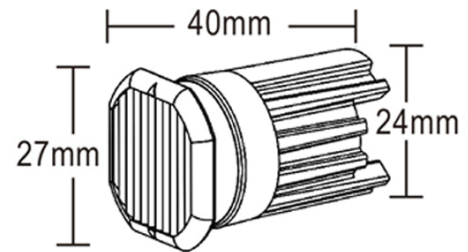

Part No.

Single Unit

- BB001-A1(ECE R65, Amber)
- BB001-B1(ECE R65, Blue)

Double Unit

- BB001-A2(ECE R65, Amber)
- BB001-B2(ECE R65, Blue)
- BB001-R2 (ECE R10, Red)
- BB001-W2(ECE R10, White)

Flash Patterns

#	Flash Patterns		
1	Single	14	Triple (Alternate)
2	Single (Slow)	15	Quad (Alternate)
3	Double	16	Octa (Fast, Alternate)
4	Double (Slow)	17	Single (Split)
5	Triple	18	Double (Split)
6	Quad (Fast)	19	Quad (Split)
7	Quad (Slow)	20	Octa (Split)
8	Octa (Fast)	21	Single (Split Accelerate)
9	Octa (Slow)	22	Double (Split Accelerate)
10	Twelve Flash	23	SOS
11	Sixteen Flash	24	Cycle (1,8,3,9,4,18)
12	Single (Alternate)	25	Cycle (2,7,9,11,19,21)
13	Double (Alternate)	26	Steady