Britalitez®

HEL6 SUPER LOW PROFILE

Warning Lamp
(Surface Mount)

Features

- Super low profile for discreet mounting.
- Self-Adhesive backing for quick simple mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 23 selectable flash patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

Specification

Meets: SAE J595 Class 1, CA13 Class B
Bulb: High-power LED x 6pcs
Warning Patterns: 23 Flash Patterns
Operating Voltage: 12~24VDC
Avg. Current: 0.25A @12VDC / 0.125A @24VDC
(varies with flash pattern)
Avg. Power: 3 Watts (varies with flash pattern)
Max. Current: 0.5A @12VDC / 0.25A @24VDC
Max. Power: 6 Watts
Wires: WhiteVcc : 20cm (24AWG)
Black-GND : 20cm (24AWG)
Brown-Flash Patterns & Sync : 20cm (24AWG)
Fuse Recommended: 1A
Multi-Unit Synchronization: Over 15 units
Available in: RED , BLUE , AMBER , WHITE
Warranty: 2 year.

Dimensions

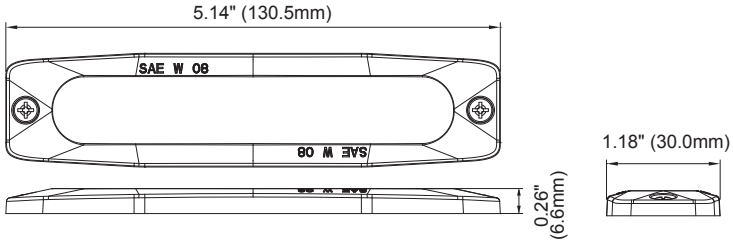

Part No.

- HEL6-A (AMBER)
- HEL6-R (RED)
- HEL6-B (BLUE)
- HEL6-W (WHITE)

Flash Patterns

Flash Patterns			
1	Single (2Hz)	13	Single H/L (split)
2	Double (2Hz)	14	Single (all) (SAE)
3	Triple (2Hz)	15	Double (all) (SAE)
4	Quad (2Hz)	16	Quad (all) (SAE)
5	Random	17	Quint (all) (SAE)
6	Single (split)	18	Mega (all)
7	Double (split)	19	Ultra (all) (SAE)
8	Quad (split)	20	Single-Quad (all)
9	Quint (split)	21	Single H/L (all)
10	Mega (split)	22	Steady Half
11	Ultra (split)	23	Steady All
12	Single-Quad (split)		

*SPLIT=Left alternate Right *ALL = Simultaneous