



Britalitez 5W Ultra Thin Grille

Specifications:


Voltage: DC 12-24V
 Flash patterns: 26
 Synchronise: Up to 15 units
 Temperature: -30° C to +60°C
 Approval: ECE R10, ECE R65, IP67



Wire:



RED..... +VDC
 BLACK.....To Chassis Ground
 YELLOW.... Pattern Selection
Apply Yellow to Black
Less than 1 second for next pattern
1 to 3 second for previous pattern
3 to 5 seconds back to pattern 1
More than 5 seconds for turn off. When power is reapplied it will resume the previous pattern.
 WHITE..... Synchronization. Connect white wire of all heads together for synchronization.

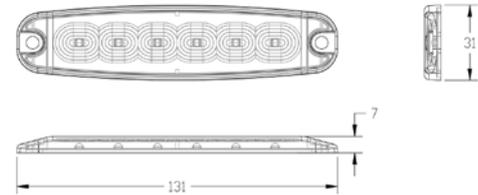

Flash Patterns

#	Flash Patterns	
1	Single	14 Triple (Alternate)
2	Single (Slow)	15 Quad (Alternate)
3	Double	16 Octa (Fast, Alternate)
4	Double (Slow)	17 Single (Split)
5	Triple	18 Double (Split)
6	Quad (Fast)	19 Quad (Split)
7	Quad (Slow)	20 Octa (Split)
8	Octa (Fast)	21 Single (Split Accelerate)
9	Octa (Slow)	22 Double (Split Accelerate)
10	Twelve Flash	23 SOS
11	Sixteen Flash	24 Cycle (1,8,3,9,4,18)
12	Single (Alternate)	25 Cycle (2,7,9,11,19,21)
13	Double (Alternate)	26 Steady



WARNING!

Do not look directly into LEDs while in operation; this may cause momentary blindness and/or eye damage.