

## TE5W ULTRA THIN 5W ECE R65 Warning Lamp (Surface Mount)



### Features

- High-Intensity 5W LED
- Multi-Voltage Input 12~24VDC
- Built-in 26 Selectable Flash Patterns
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.
- Aluminum base for heat dissipation.

### Specification

**Meets:** ECE R10, ECE R65, E-Approved, CE

**Bulb:** 5W LED x 3pcs/4pcs/6pcs

**Warning Patterns:** 26 Flash Patterns

**Operating Voltage:** 12~24VDC


**Wire Functions:** Red - Vcc  
Black - GND  
Yellow - Flash Patterns  
White - Sync

**Available in:** AMBER

### Part No.

- TE5W-3A (R65 Amber 3-LED)
- TE5W-4A (R65 Amber 4-LED)
- TE5W-6A (R65 Amber 6-LED)

### Dimensions

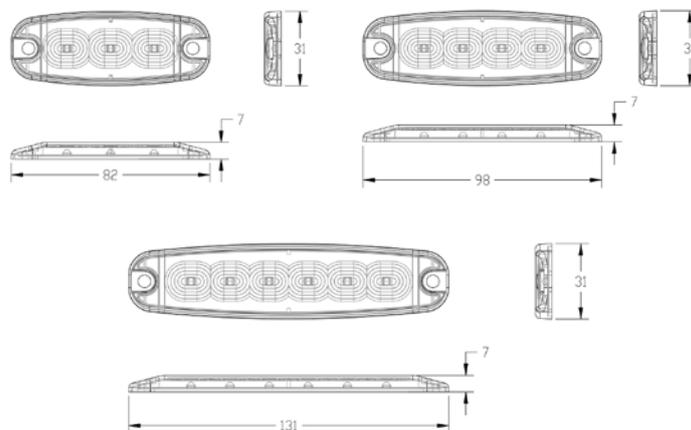

### Flash Patterns

FP#	Flash Patterns	
1	Single	14 Triple (alternate)
2	Single (slow)	15 Quad (alternate)
3	Double	16 Octa (fast, alternate)
4	Double (slow)	17 Single (split)
5	Triple	18 Double (split)
6	Quad (fast)	19 Quad (split)
7	Quad (slow)	20 Octa (split)
8	Octa (fast)	21 Single (split accelerate)
9	Octa (slow)	22 Double (split accelerate)
10	Twelve	23 SOS
11	Sixteen	24 Cycle (1, 8, 3, 9, 4, 18)
12	Single (alternate)	25 Cycle (2, 7, 9, 11, 19, 21)
13	Double (alternate)	26 Steady