

LED FLUSH MOUNT KIT

12~24VDC

Dual Colour



LED FLASH CONTROLLER x 1pc

MOUNTING GROMMET x 2pcs



EXTENSION CABLE x 1pc



LIGHTHEAD x 2pcs



FEATURES

- Classic series is now available in Dual Colour.
- Multi-memories design for instant switch between selected flash patterns and/or colours.
- Heavy-duty design with waterproof connectors.
- 2 heads to 1 flash controller for easy set-up and installation.
- Multi-Voltage Input 12~24VDC.
- Multi units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Fully weatherproof and vibration resistant lighthouse design for exterior or interior use.

SPECIFICATIONS

Compliance: SAE J595 Class 1, ECE R10, IPX7

LED Element: High intensity LED x 12

No. of Warning Patterns: 26 Flash Patterns

Operating Voltage: 12~24 VDC

Avg. Current: 0.55A @12VDC / 0.28A @24VDC
(varies with flash pattern)

Avg. Power: 6.6W
(varies with flash pattern)

Max. Current: 1.1A @12VDC / 0.55A @24VDC

Max. Power: 13.2W

Wires: Red-Vcc: 180cm (20AWG)

Black-GND: 180cm (20AWG)

Yellow-Flash Patterns & Sync: 180cm (20AWG)

White-Phase: 180cm (20AWG)

Cable Lengths: Output : 79cm (24AWG)

Extension : 200cm (24AWG)

Lighthouse : 18cm (24AWG)

Max. Cable Lengths: Controller Cable = 450cm
Lighthouse Cable = 780cm

Fuse Rating: 2A

Synchronization: Over 15 units


LED Colour: Amber, Blue, Green, Red, White

Lens Colour: Clear


Warranty: 5 Years

DIMENSIONS

Lighthouse

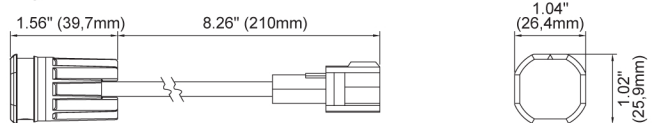

LED Controller

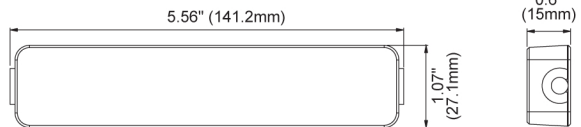

FLASH PATTERNS

Flash Patterns			
1	Double [2Hz]	14	Random
2	Single [2Hz]	15	Double [2Hz] (Split)
3	Triple [2Hz]	16	Single [2Hz] (Split)
4	Quad [2Hz]	17	Triple [2Hz] (Split)
5	Single	18	Quad [2Hz] (Split)
6	Double	19	Single (Split)
7	Quad	20	Double (Split)
8	Quint	21	Quad (Split)
9	Mega	22	Quint (Split)
10	Ultra	23	Mega (Split)
11	Single-Quad	24	Ultra (Split)
12	Single H/L	25	Single-Quad (Split)
13	Steady	26	Single H/L (Split)

(Split) = Head 1 alternating Head 2.

OPTIONAL ACCESSORIES

(Single L-Bracket)

