

X3 EDGE SABER

ECE R10 3-LED Slimline Warning Light (Bracket Mount)



Features

- 0.62" (15.79mm) Lowest narrow profile with remarkable Class 1 output.
- Universal Angle Adjustable Bracket, mounting virtually anywhere.
- Brand-new unique optical design for efficient and powerful output.
- ECE R10 EMC Compliance.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for best heat dissipation.

Specification

Meets: SAE J595 Class1, CA13, ECE R10, IPX8

Bulb: High-power LED x 3pcs

Warning Patterns: 12 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.4A @12VDC / 0.2A @24VDC
(varies with flash pattern)

Avg. Power: 4.74 Watts (varies with flash pattern)

Max. Current: 0.79A @12VDC / 0.4A @24VDC

Max. Power: 9.48 Watts

Wires: Red-Vcc : 25cm (20AWG)
Black-GND : 25cm (20AWG)
Yellow-Sync & Functions : 25cm (20AWG)


Fuse Recommended: 1A

Available in: RED, BLUE, AMBER, WHITE

Part No.

- X3-H-A (ECE R65, Amber)
- X3-H-B (ECE R65, Blue)
- X3-H-R (ECE R65, Red)
- X3-H-W (ECE R10, White)

Dimensions

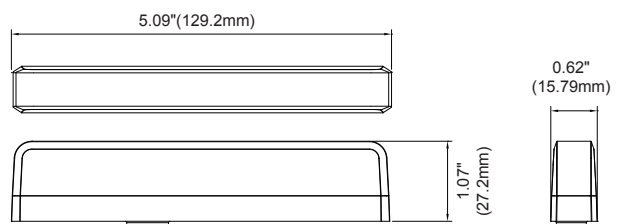


Flash Patterns

| # | Flash Patterns | |
|---|----------------|------------------------|
| 1 | Double [2Hz]* | 9 Double [SAE] |
| 2 | Single [2Hz] | 10 Triple [SAE] |
| 3 | Triple [2Hz] | 11 Quad [SAE] |
| 4 | Quad [2Hz] | 12 Quint [SAE] |
| 5 | Random | 13 Ultra [SAE] |
| 6 | Steady | 14 Single-Quad |
| 7 | Single [SAE] | 15 Single H/L |
| 8 | Mega | 16 Single-Triple-Quint |


*Actual R65 Approved Flash Pattern.

Mounting Brackets

Universal Bracket (Angle-Adjustable)

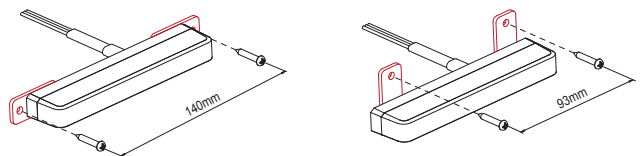

L-Bracket (Front)



L-Bracket (Rear)

